

Scenario control

User manual



5739 02
5739 03

Part. U3327A - 11/08-01 PC

 **legrand®**

■ The Scenario Control	4
✓ General information	4
✓ Description	4
■ Mode of operation	5
✓ To program a scenario	5
✓ To cancel a scenario	6
✓ How your Scenario Control is configured	6

1 - Introduction

■ The Scenario Control


✓ General information

The Scenario Control is a device which lets you call, create or edit scenarios saved in an 0035 51 Scenario Module, simply and intuitively.

Using the labels you can customise the device keys, inserting a description of the scenario activated.



✓ Description

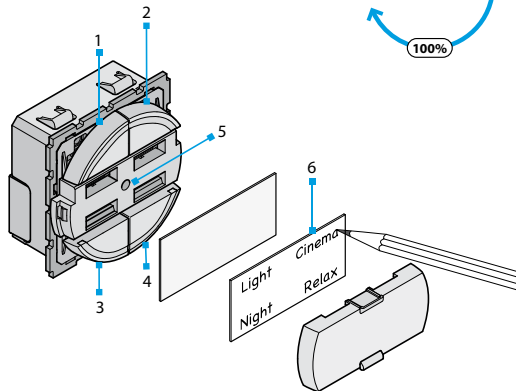

- 1-4 Control keys
- 5 Brightness setting pushbutton *
- 6 Customised label


*To set the brightness of the key LEDs press them for more than two seconds as shown in the diagram.

■ Mode of operation

✓ To program a scenario


Your Scenario Control can program up to four scenarios, saving them in a Scenario Module (0035 51) which has been enabled for programming.

To save one or more scenarios:



In the Scenario Module press the programming enabling pushbutton.

Its led becomes green:
the module is enabled.




$t > 4 s$

Press the key to program for more than four seconds.


When the led lights up release the key.

The led flashes to indicate that the programming mode has been activated.




Press the key to end the programming.

Repeat the sequence to add, edit or cancel a scenario command.



Press the corresponding key to activate the scenario required.



Set the sequence of commands which make up the scenario.




At the end of the programming you should disable the possibility of editing the scenarios by pressing the Scenario Module (0035 51) enable/disable pushbutton. The led becomes red.

2 - Use

✓ To cancel a scenario


Follow the procedure described below to cancel a scenario.

To cancel one or more scenarios:



In the Scenario Module press the programming enabling pushbutton.

Its led becomes green: the module is enabled.



To cancel a scenario press the key for the scenario to be removed for at least eight seconds.

After three seconds the led lights up and after five seconds it goes out. Release the key.

Now if the led flashes quickly for about two seconds the scenario has been cancelled. If it continues to shine steadily the procedure has not been successful.



Use the Scenario Module (0035 51) reset pushbutton to cancel all its scenarios.

✓ How your Scenario Control is configured



SCENARIO NAME	SCENARIO DESCRIPTION
1	
2	
3	
4	




World Headquarters and
International Department
87045 LIMOGES CEDEX FRANCE

☎ : 33 5 55 06 87 87

Fax : 33 5 55 06 74 55

www.legrandelectric.com

Installer stamp



Legrand reserves at any time the right to modify the contents of this booklet and to communicate, in any form and modality, the changes brought to the same.