

NEW

floor boxes 3 module for screed floor and raised floor

floor boxes 3 modules for screed floor and raised floor



0896 44

0896 49

Conform to EN 50 085 - 2.2 and EN 60670-23
Flat and simple installation
Compatible with raised floor and screed floor system

Pack	Cat.Nos	Floor service outlet boxes - 3 modules
1	0896 44	Access units for raised or concrete floor (minimum height 80 mm) Floor service outlet box - 3 modules . Grey RAL 7031. To be Equipped with Arteor Mechanism
1	0896 49	Flush mounting box for concrete for Cat.No 0896 44

Material characteristics

The floor boxes are on plastic PC/ABS RAL 7031.
Temperature of use of transport and storage: -5 °C/+60 °C

- Conform to standard NF EN 60.670-1
- 20/IK07
- color Grey RAL 7031

Technical information

Compression test, 500N / 1 cm² during 1 min :
Comply with norm CEI 60670-23 (2004)

No degradation after 10000 opening/closing

For restoration in the presence of a technical floor low depth or for concrete (height 80 mm)


To be equipped with 2 module Arteor sockets & 1 module data or switch

2 covers of independent exit for the cables current low and high tension current

Dimensions

Under floor boxes 3 modules:

Cat.No 0896 44

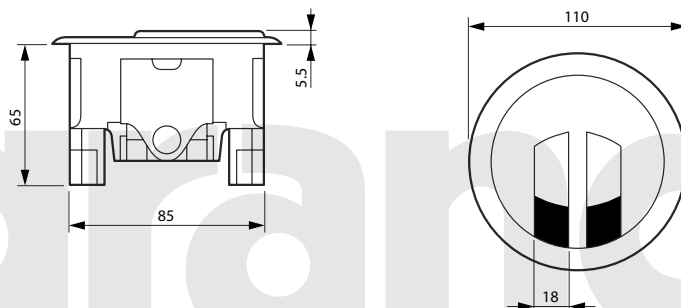

Flush mounting box:

Cat.No 0896 49

