



## Technical characteristics

### Height adjustment

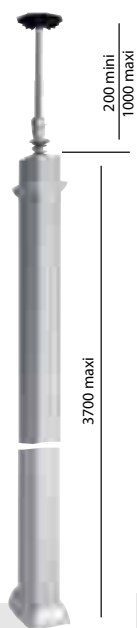


Snap-on column 3.7 m

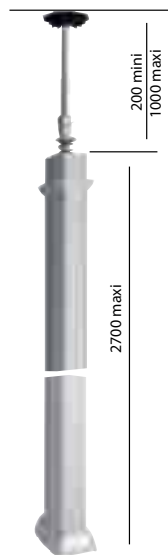


Snap-on column 2.7 m

### Fixing base

#### 1-compartment columns



#### 2-compartment columns



### Wiring capacity

#### 1-compartment columns

Max. capacity of conductors (for each type of conductor)		With 45 mm mechanisms	Without wiring accessories
Cross-section		2916	4150
Wire	1.5 mm <sup>2</sup> Ø3	324	460
	2.5 mm <sup>2</sup> Ø3.5	238	338
Cable	3 x 1.5 mm <sup>2</sup> Ø9	36	51
	3 x 2.5 mm <sup>2</sup> Ø11	24	34
	FTP cat. 6 or coaxial Ø7	59	84

#### 2-compartment columns

Max. capacity of conductors (for each type of conductor)		With 45 mm mechanisms		Without wiring accessories	
Compartment		2	3	2	3
Cross-section		2683	2683	3900	3900
Wire	1.5 mm <sup>2</sup> Ø3	298	298	435	435
	2.5 mm <sup>2</sup> Ø3.5	219	219	319	319
Cable	3 x 1.5 mm <sup>2</sup> Ø9	33	33	48	48
	3 x 2.5 mm <sup>2</sup> Ø11	22	22	32	32
	FTP cat. 6 or coaxial Ø7	54	54	79	79