
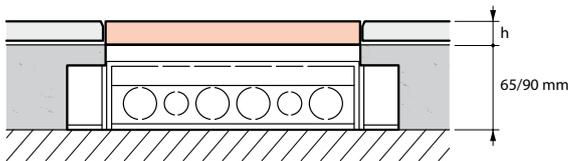


floor boxes for tile screed floor

■ Lid & trim


Floor box for tile / marbles
Cat.Nos 6896 52/55/56




Total screed thickness has to be between 65 and 90 mm

Backbox for tiles/marble	Lid and trim for floor box for tiles/marble	Screed thickness (mm)	Tile thickness h (mm)
0896 04	 6896 52 6896 55 6896 56	65 to 90	15 to 22 8-15 mm 8-15 mm

Dimensions (in mm) Cat.No 6896 52

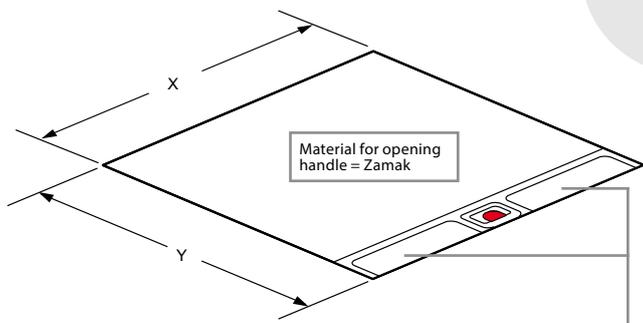


Full metal rigid cable exits: Maximum cable capacity 4 cables Ø 7 mm + 3 cables Ø 11 mm Provides maximum protection for cables and strength




Cat.No	X	Y	A	B
6896 52	264	264	64	54

Material of floor boxes for tiles / marble: stainless steel material AISI 304.

Dimensions (in mm) Cat.Nos 6896 55/56



Dimensions (in mm)

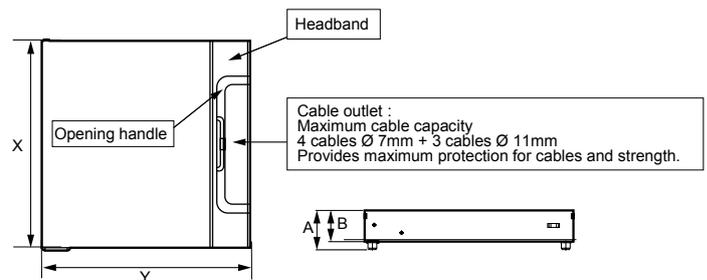

Dimensions (mm):

Cat.Nos	X	Y	A	B
6896 55/56	264	264	57	47

Material of floor boxes for tiles/marble:
galvanised steel (DX51D Z275 MAC)

Material for Headband and Cable outlet:
Cat.No 6896 55 : galvanised steel + paint RAL 7031
Cat.No 6896 56 : stainless steel 304


Material for opening handle:
Cat.No 6896 55 : Zamak + paint RAL 7031
Cat.No 6896 56 : Zamak + send blasting + varnish

■ Functions

Cat.No 6896 52



Rigid cable exits

Full metal rigid cable exits
Maximum cable capacity 4 cables Ø 7 mm + 3 cables Ø 11 mm
Provides maximum protection for cables and strength

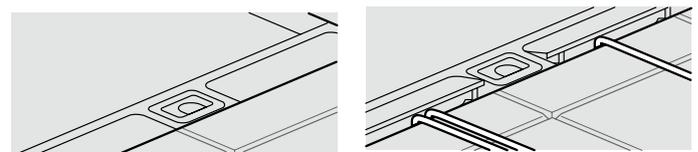


Locking system

The floor box can be locked by means of a locking system on the lid (hidden under the opening handle)
For safety reasons, floor box should not be locked when in use

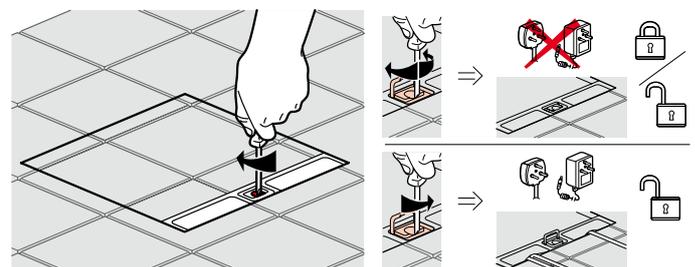


floorboxes for tile for screed floor


Installation process




To remove the lid from the trim, hold it under an angle of approximately 65° and pull it out

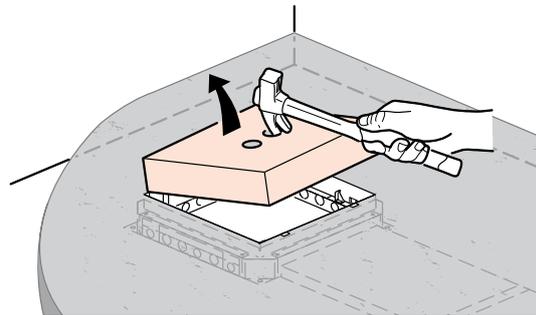


Remove site cover protection from backbox

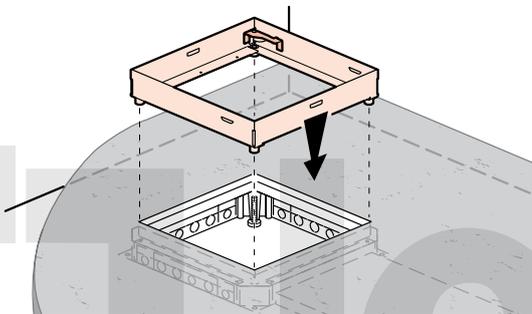


Place the trim onto the threaded rods

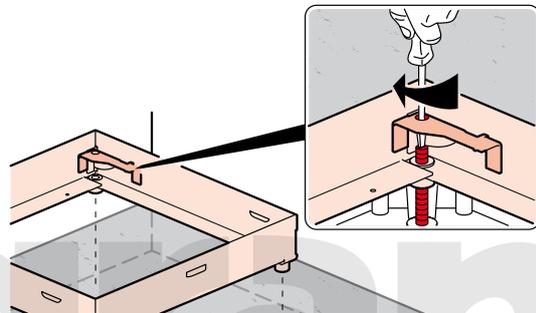


Make a rough adjustment to finished floor level by turning threaded rods in each corner with a screw driver

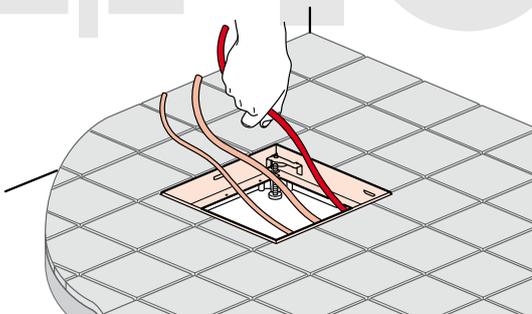


Cable the system

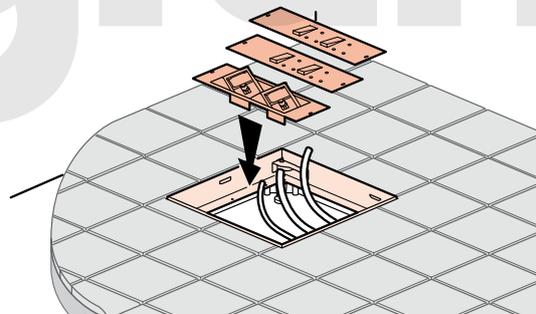

Tiling should be carried out at this stage

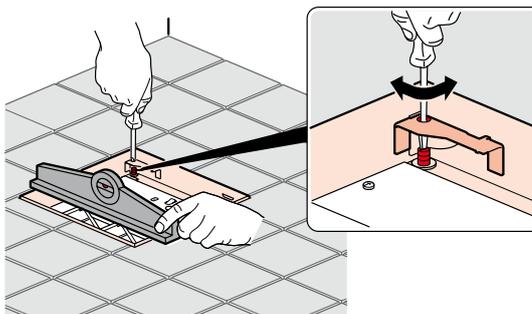

Make final adjustment to finished floor level by turning threaded rods in each corner with a screw driver

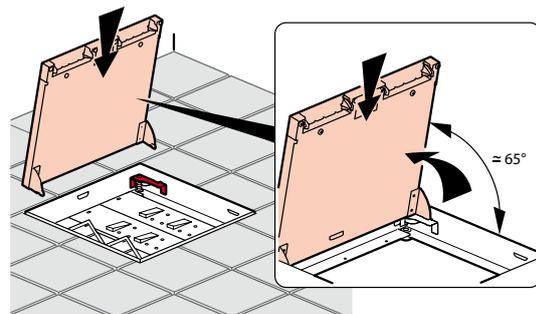

Push the lid back in place by holding it under an angle of approximately 65°