

## configuration tools and accessories


### ■ Customising settings on-site

All sensors are preset in the factory


- 500 lux light level threshold for ceiling mounted sensors and 300 lux for surface mounting sensors
- 15-minute time delay and walkthrough function activated

The configuration tools are used to adjust the preset settings and the detection sensitivity


### ■ Installing surface mounting boxes Cat.Nos 0488 74/75

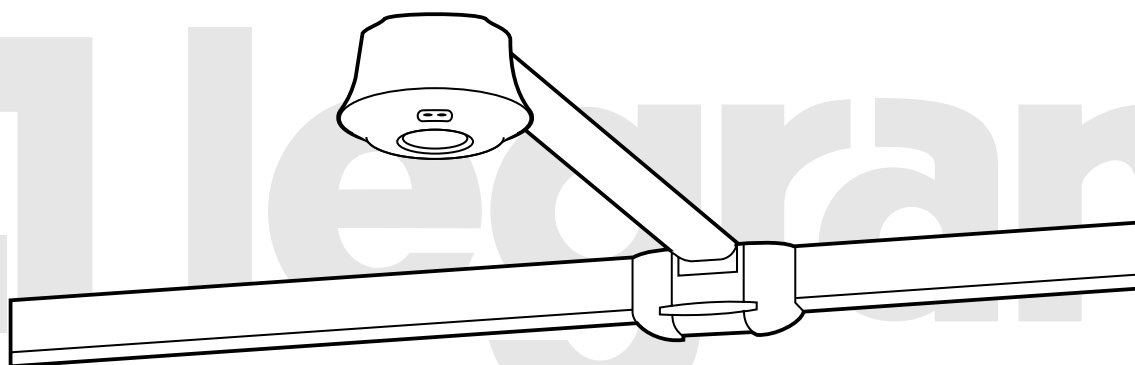

### ■ Installing fixing accessories in/on a corner (view from above)

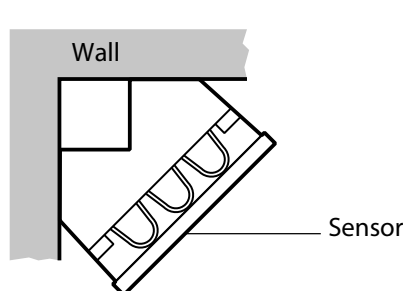

Mounting in  
internal corner



Mounting on  
external corner